GOCAGE







Secage.it







20,00 m



18,00 m



9,50 m



140x70x110



225 kg



 ∞



aluminium



90°+90°




hydraulic



A+A

DA Series Standard Equipment:

- Aluminium basket
 1400x700x1100 mm
- Engine start/stop from the basket
- · Buzzer from the basket
- · Electric hourmeter
- Visual control device for chassis stabilization
- Hydraulic system with differential filtering system in both flow direction
- Emergency hand pump
- 230 V electric socket
- Cage rotation 90° + 90°
- Continuous Turntable rotation
- Flanged holding valves
- Aerial Part standard painting:
 white RAL 9016
- Cylinders, turntable:
 blue RAL 5015
- Electric system in KIT for subframe
- Hydraulic system in KIT for
- Converter 24V for trucks

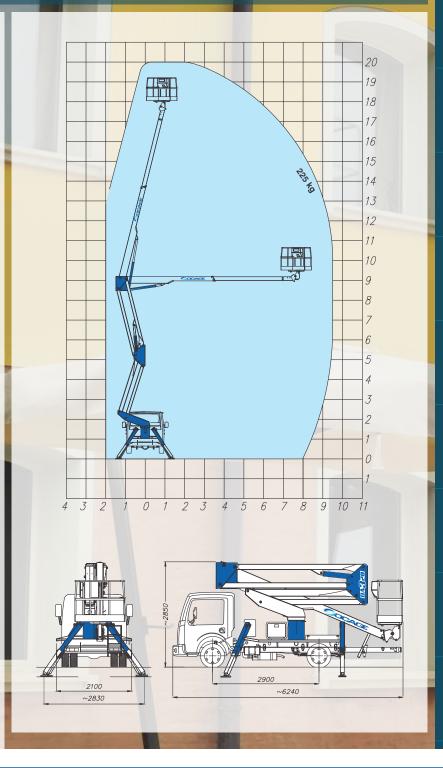

Standard DA Min. Pump Max Max. Max. Weight Cage GVW Series Flow Pressure Heigh Outreach Capacity 1200 kg **DA 320** 3,5 T. 16 l/m 230 bar 20 mt. 9,5 mt. 225 kg